

ENCO

ENCO STELO



ENCO

Apparecchio per illuminazione di esterni costituito da:

- Palo in alluminio estruso verniciato
- Struttura superiore in alluminio pressofuso verniciato
- Diffusore in policarbonato
- Parabola riflettente in alluminio
- Guarnizione in silicone
- Viti di chiusura in acciaio inox
- Verniciatura in polveri poliestere ad elevata resistenza ai raggi ultravioletti e alla corrosione

Outdoor luminaire constructed of:

- Painted extruded aluminium post
- Painted die-cast aluminium head
- Polycarbonate diffuser
- Aluminium reflector
- Silicon gasket
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders



ENCO STELO

Apparecchio per esterni costituito da:

- Corpo in alluminio pressofuso verniciato
- Palo in alluminio estruso verniciato
- Diffusore in policarbonato

Outdoor post luminaire constructed of:

- Painted die-cast aluminium body
- Painted extruded aluminium post
- Polycarbonate diffuser




Colori - Colours


X=9  Antracite
Anthracite

X=4  Silver


Diffusore - Diffuser
Codice-Code 08 4080




Cod. 4080
Installazione a parete
Wall mounting




Cod. 4082 - 4086
Installazione a terra
Floor mounting



Entrata singola cavi di alimentazione
Single power supply cables input



LED
Led a tensione di rete 220/240V 50/60Hz.
Connessione diretta alla rete di alimentazione
senza necessità di alimentatore.
LED's direct operation at 220/240V 50/60Hz.
No power supply is required.




IK 08





4080


4080.00X	LED	8W	E27	
4080.55X	LED	9W	1240 lm	4000 K
4080.56X	LED	9W	1160 lm	3000 K



4086 H 700
4082 H 1100

4086.00X	LED	8W	E27	
4086.55X	LED	13W	1790 lm	4000 K
4086.56X	LED	13W	1790 lm	3000 K

4082.00X	LED	8W	E27	
4082.55X	LED	13W	1790 lm	4000 K
4082.56X	LED	13W	1790 lm	3000 K

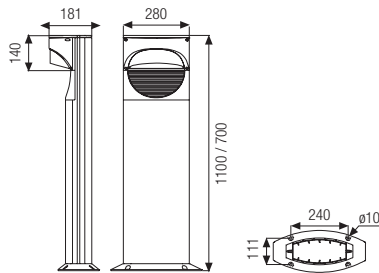

ENCO STELO