

EDGE

_Lampada da parete in alluminio, montaggio in aderenza a parete tramite supporto in metallo.

_Indoor aluminum wall lamp, surface wall mount with metal bracket.



955
3000K
bianco sabbato
sanded white

955N
4000K
bianco sabbato
sanded white




955B
3000K
nero sabbato
sanded black

955BN
4000K
nero sabbato
sanded black



finitura finish	vernice epossidica epoxy varnish
sorgente luminosa light source	LED SMD San'an Optoelectronics
	3000K 1400lm* CRI 81,7 ra
	4000K 1400lm* CRI 81,7 ra
	luce indiretta indirect lighting
potenza nominale reference power	18W
driver incluso - diffusori in PMMA integrated driver - PMMA diffuser	
  IP20	

* valore riferito alla sorgente luminosa
value relevant to the light source





_Lampada da parete in alluminio,
montaggio in aderenza a parete tramite
supporto in metallo.

_Indoor aluminum wall lamp,
surface wall mount with metal bracket.



956
3000K
bianco sabbato
sanded white

956N
4000K
bianco sabbato
sanded white




956B
3000K
nero sabbato
sanded black

956BN
4000K
nero sabbato
sanded black

finitura finish	vernice epossidica epoxy varnish
sorgente luminosa light source	LED SMD San'an Optoelectronics
	3000K 2000lm* CRI 81,7 ra
	4000K 2000lm* CRI 81,7 ra
	luce indiretta indirect lighting
potenza nominale reference power	30W
driver incluso - diffusori in PMMA integrated driver - PMMA diffuser	
CE  IP20	


* valore riferito alla sorgente luminosa
value relevant to the light source

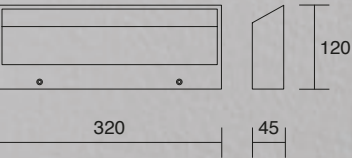



_Lampada da parete in alluminio,
montaggio in aderenza a parete tramite
supporto in metallo.

_Indoor aluminum wall lamp,
surface wall mount with metal bracket.

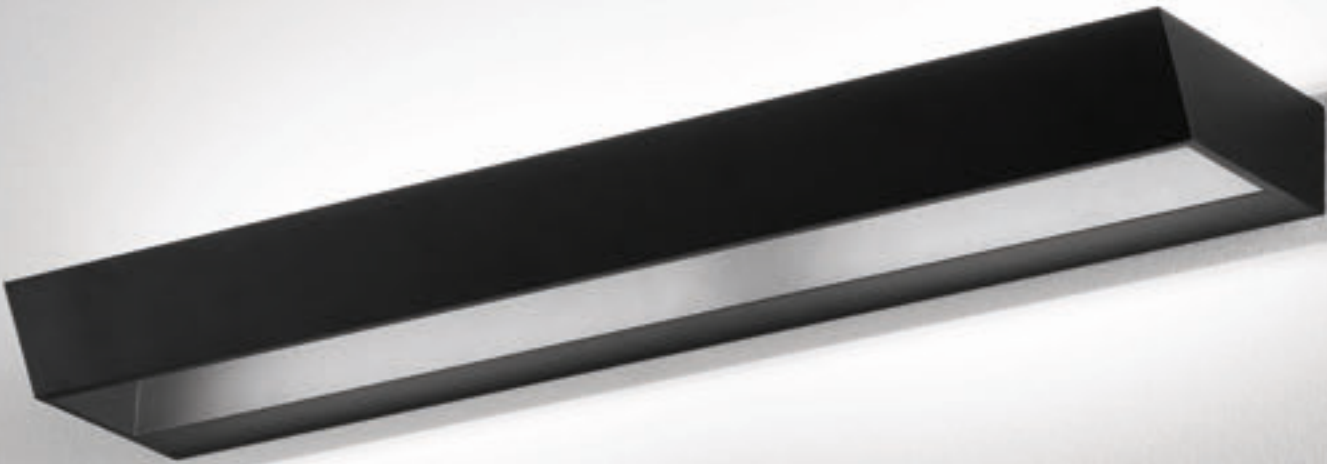

957 3000K
bianco sabbato
sanded white

957N 4000K
bianco sabbato
sanded white



957B 3000K
nero sabbato
sanded black

957BN 4000K
nero sabbato
sanded black

finitura finish	vernice epossidica epoxy varnish
sorgente luminosa light source	LED SMD San'an Optoelectronics
	3000K 4000lm* CRI 80,1 ra
	4000K 4000lm* CRI 80,1 ra
	luce indiretta indirect lighting
potenza nominale reference power	50W
driver incluso - diffusori in PMMA integrated driver - PMMA diffuser	
  	

* valore riferito alla sorgente luminosa
value relevant to the light source

