


NK-NS1212



CRI Color Rendering Index:	>80						
Flusso luminoso Luminous flux:	da 350 Lm/m a 400 Lm/m						
Potenza al metro Power per meter:	12 W/m						
Voltaggio Voltage:	24 V						
Resa luminosa Light output:	Luce continua Uniform light						
Lunghezza rolla Roll length:	5 m						
Grado protezione Protection:	IP67						
Colori disponibili Colors:	<table border="0"> <tr> <td>3000 K</td> <td>.WW</td> </tr> <tr> <td>4000 K</td> <td>.NW</td> </tr> <tr> <td>6000 K</td> <td>.CW</td> </tr> </table>	3000 K	.WW	4000 K	.NW	6000 K	.CW
3000 K	.WW						
4000 K	.NW						
6000 K	.CW						

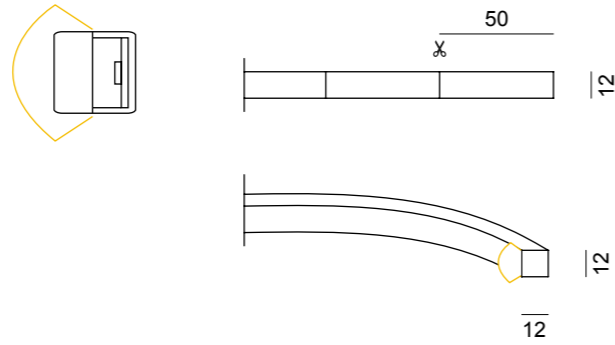


ACCESSORI ACCESSORIES

TRM-1212



Testate di chiusura
End caps

CLIP-1212



Clip fissaggio alluminio
Aluminum fixing clip