



# TURTLE

**Plafoniera ovale led da esterno con finitura bianca o antracite**  
 Led ceiling light for outdoor - oval, white or dark grey  
 Plafon oval led, uso externo, com acabamento branco ou antracite

installazione / installation / instalação: plafoniera / ceiling lamp / plafon  
 applique / applique

## VOD 71\_08 BI 4000K

• 4000 K  
 670 lumen

finitura / finished / acabamento

voltaggio / voltage / voltagem  
 driver

misure / measures / medida

angolo / beam angle / ângulo

cri

durata / life / duração

materiale / material

peso / weight

## VOD 71\_08 DG 4000K

• 4000 K  
 670 lumen

bianco / white / branco / weiß / blanc / blanco   
 antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

AC 220-240V ~ 50/60 Hz

incorporato / integrated / integrado

175 x 85mm, H 60mm

120°


> 80

> 25.000 ore / hours

Plastica / Plastic

90 g

**8W**  **IP65**

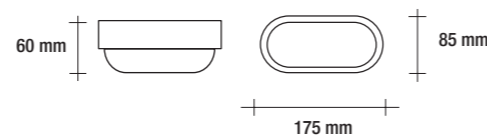

## VOD 71\_20 BI 4000K

• 4000 K  
 1500 lumen

finitura / finished / acabamento

voltaggio / voltage / voltagem  
 driver

misure / measures / medida

angolo / beam angle / ângulo

cri

durata / life / duração

materiale / material

peso / weight

## VOD 71\_20 DG 4000K

• 4000 K  
 1500 lumen

bianco / white / branco / weiß / blanc / blanco   
 antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

AC 220-240V ~ 50/60 Hz

incorporato / integrated / integrado

200 x 100mm, H 60mm

120°


> 80

> 25.000 ore / hours

Plastica / Plastic

120 g

**20W**  **IP65**

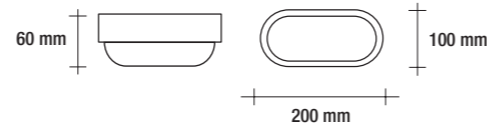

# SEAL

**Plafoniera tonda led da esterno con finitura bianca o antracite**  
 Led ceiling light for outdoor - round, white or dark grey  
 Plafon redondo led, uso externo, com acabamento branco ou antracite

installazione / installation / instalação: plafoniera / ceiling lamp / plafon  
 applique / applique

## VOD 72\_08 BI 4000K

• 4000 K  
 700 lumen

finitura / finished / acabamento

voltaggio / voltage / voltagem  
 driver

misure / measures / medida

angolo / beam angle / ângulo

cri

durata / life / duração

materiale / material

peso / weight

## VOD 72\_08 DG 4000K

• 4000 K  
 700 lumen

bianco / white / branco / weiß / blanc / blanco   
 antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

AC 220-240V ~ 50/60 Hz

incorporato / integrated / integrado

Ø 160mm, H 60mm

120°


> 80

> 25.000 ore / hours

Plastica / Plastic

110 g

**8W**  **IP65**

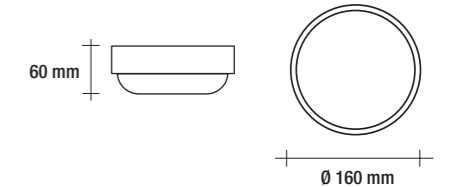

## VOD 72\_20 BI 4000K

• 4000 K  
 1500 lumen

finitura / finished / acabamento

voltaggio / voltage / voltagem  
 driver

misure / measures / medida

angolo / beam angle / ângulo

cri

durata / life / duração

materiale / material

peso / weight

## VOD 72\_20 DG 4000K

• 4000 K  
 1500 lumen

bianco / white / branco / weiß / blanc / blanco   
 antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

AC 220-240V ~ 50/60 Hz

incorporato / integrated / integrado

Ø 175mm, H 60mm

120°

> 80

> 25.000 ore / hours

Plastica / Plastic

150 g

**20W**  **IP65**

