

RAIN

Proiettore led da esterno, IP65, con finitura bianca o antracite, vetro satinato

Led garden light - IP65, white or dark grey, frosted glass

Projektor led, uso externo, IP65, com acabamento branco ou antracite, vidro fosco


VOD 73_20 BI

• 4000 K
1600 lumen

VOD 73_20 DG

• 4000 K
1600 lumen

20W IP65

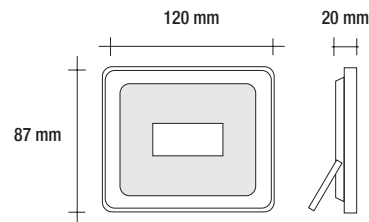

finitura / finished / acabamento

bianco / white / branco / weiß / blanc / blanco
antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

voltaggio / voltage / voltagem
driver

AC 220-240V ~ 50/60 Hz

misure / measures / medida

integrato / Integrated / integrado

angolo / beam angle / ângulo

120 x 20mm, H 87mm

cri

110°

durata / life / duração

> 80

materiale / material

> 25.000 ore / hours

peso / weight

alluminio+vetro / aluminium+glass / alumínio+vidro

250 g


VOD 73_30 BI

• 4000 K
2550 lumen

VOD 73_30 DG

• 4000 K
2550 lumen

30W IP65

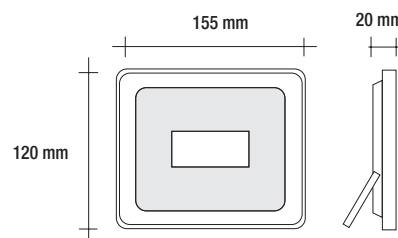

finitura / finished / acabamento

bianco / white / branco / weiß / blanc / blanco
antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

voltaggio / voltage / voltagem
driver

AC 220-240V ~ 50/60 Hz

misure / measures / medida

integrato / Integrated / integrado

angolo / beam angle / ângulo

155 x 20 mm, H 120mm

cri

110°

durata / life / duração

> 80

materiale / material

> 25.000 ore / hours

peso / weight

alluminio+vetro / aluminium+glass / alumínio+vidro

438 g


VOD 73_50 BI

• 4000 K
4250 lumen

VOD 73_50 DG

• 4000 K
4250 lumen

50W IP65

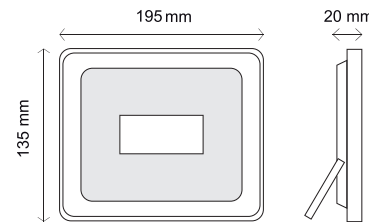

finitura / finished / acabamento

bianco / white / branco / weiß / blanc / blanco
antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

voltaggio / voltage / voltagem
driver

AC 220-240V ~ 50/60 Hz

misure / measures / medida

integrato / Integrated / integrado

angolo / beam angle / ângulo

195 x 20mm, H 135mm

cri

110°

durata / life / duração

> 80

materiale / material

> 25.000 ore / hours

peso / weight

alluminio+vetro / aluminium+glass / alumínio+vidro

620 g

PADDLE

Proiettore led da esterno, IP65, con finitura bianca o antracite, vetro satinato

Led garden light - IP65, white or dark grey, frosted glass

Projektor led, uso externo, IP65, com acabamento branco ou antracite, vidro fosco



VOD 65_20 BI

• 4000 K
1900 lumen

VOD 65_20 DG

• 4000 K
1900 lumen

20W IP65

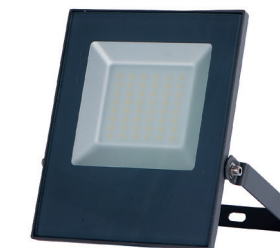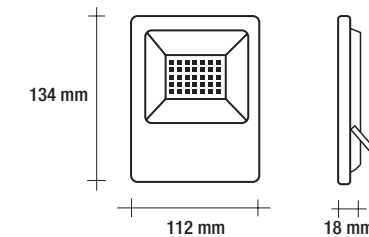

finitura / finished / acabamento

bianco / white / branco / weiß / blanc / blanco
antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

voltaggio / voltage / voltagem
driver

AC 220-240V ~ 50/60 Hz

misure / measures / medida

integrato / integrated / integrado

angolo / beam angle / ângulo

112 x 18mm, H 134mm

cri

115°

durata / life / duração

> 80

materiale / material

> 25.000 ore / hours

peso / weight

alluminio+vetro / aluminium+glass / alumínio+vidro

264 g



VOD 65_30 BI

• 4000 K
2850 lumen

VOD 65_30 DG

• 4000 K
2850 lumen

30W IP65

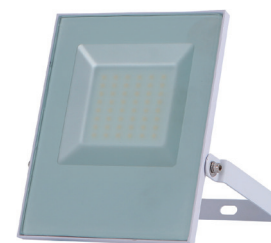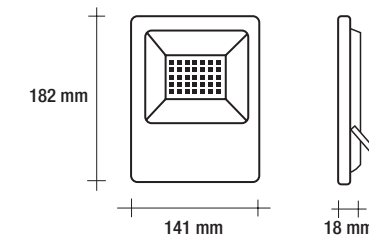

finitura / finished / acabamento

bianco / white / branco / weiß / blanc / blanco
antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

voltaggio / voltage / voltagem
driver

AC 220-240V ~ 50/60 Hz

misure / measures / medida

integrato / integrated / integrado

angolo / beam angle / ângulo

141 x 18mm, H 182mm

cri

115°

durata / life / duração

> 80

materiale / material

> 25.000 ore / hours

peso / weight

alluminio+vetro / aluminium+glass / alumínio+vidro

418 g


VOD 65_50 BI

• 4000 K
4750 lumen

VOD 65_50 DG

• 4000 K
4750 lumen

50W IP65

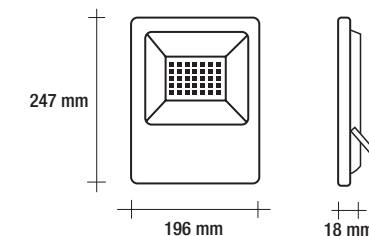

finitura / finished / acabamento

bianco / white / branco / weiß / blanc / blanco
antracite / dark grey / dunkelgrau / gris foncé / gris oscuro

voltaggio / voltage / voltagem
driver

AC 220-240V ~ 50/60 Hz

misure / measures / medida

integrato / integrated / integrato

angolo / beam angle / ângulo

196 x 18mm, H 247mm

cri

115°

durata / life / duração

> 80

materiale / material

> 25.000 ore / hours

peso / weight

alluminio+vetro / aluminium+glass / alumínio+vidro

832 g