

NICK

Faretto incasso quadro led, orientabile, con finitura bianca

Cob led recessed spotlight - square, adjustable, white

Spot de embutir quadrado led, ajustável, com acabamento branco


VRD 26_03 BI 3000K

● 3000 K
225 lumen

VRD 26_03 BI 4000K

● 4000 K
230 lumen

3W IP20

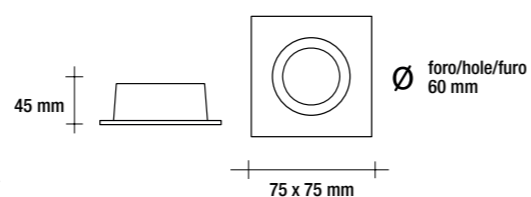

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 100-240V ~ 50/60 Hz
incorporato / integrated / integrado
75 x 75 mm, H 45 mm
Ø 60 mm
38°
> 80
> 20.000 ore / hours
PBT + alluminio / PBT + aluminium / PBT + alumínio
81 g




VRD 26_07 BI 3000K

● 3000 K
455 lumen

VRD 26_07 BI 4000K


● 4000 K
480 lumen

7W IP20

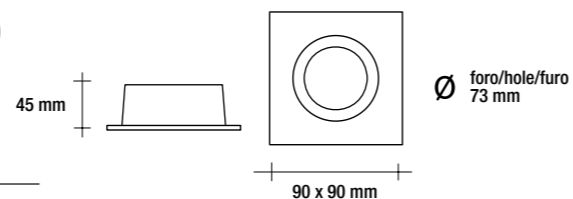

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 100-240V ~ 50/60 Hz
incorporato / integrated / integrado
90 x 90 mm, H 45 mm
Ø 73 mm
38°
> 80
> 20.000 ore / hours
PBT + alluminio / PBT + aluminium / PBT + alumínio
112,6 g

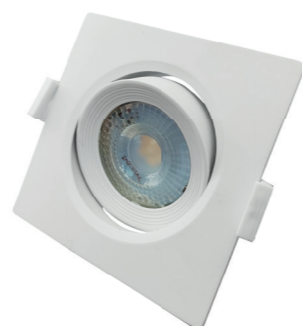


VRD 26_10 BI 3000K

● 3000 K
700 lumen

VRD 26_10 BI 4000K

● 4000 K
750 lumen

10W IP20

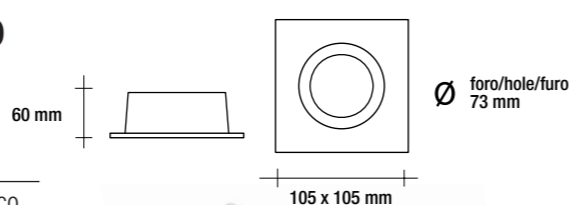

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 100-240V ~ 50/60 Hz
incorporato / integrated / integrado
105 x 105 mm, H 60 mm
Ø 73 mm
38°
> 80
> 20.000 ore / hours
PBT + alluminio / PBT + aluminium / PBT + alumínio
167,6 g



NICK

Faretto incasso quadro led, orientabile, con finitura bianca

Cob led recessed spotlight - square, adjustable, white

Spot de embutir quadrado led, ajustável, com acabamento branco


VRD 26_12 BI 3000K

● 3000 K
1000 lumen

VRD 26_12 BI 4000K

● 4000 K
1050 lumen

12W IP20

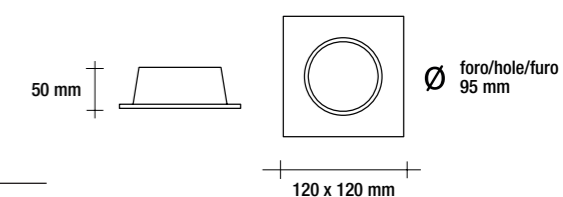

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 100-240V ~ 50/60 Hz
incorporato / integrated / integrado
120 x 120 mm, H 50 mm
Ø 95 mm
45°
> 80
> 20.000 ore / hours
PBT + alluminio / PBT + aluminium / PBT + alumínio
174 g




VRD 26_15 BI 3000K

● 3000 K
1200 lumen

VRD 26_15 BI 4000K


● 4000 K
1250 lumen

15W IP20

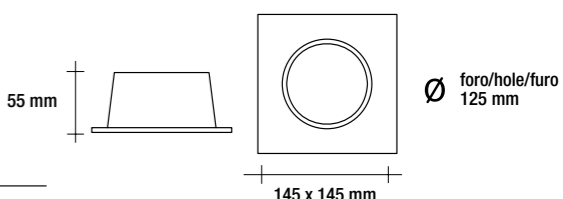

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 100-240V ~ 50/60 Hz
incorporato / integrated / integrado
145 x 145 mm, H 55 mm
Ø 125 mm
45°
> 80
> 20.000 ore / hours
PBT + alluminio / PBT + aluminium / PBT + alumínio
245 g

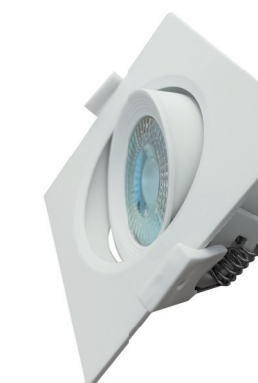


VRD 26_18 BI 3000K

● 3000 K
1400 lumen

VRD 26_18 BI 4000K

● 4000 K
1450 lumen

18W IP20

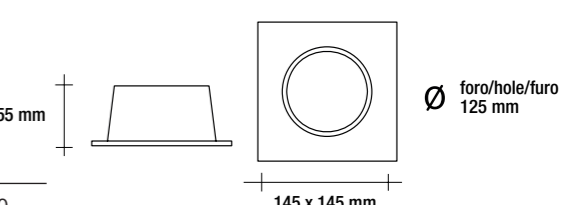

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 100-240V ~ 50/60 Hz
incorporato / integrated / integrado
145 x 145 mm, H 55 mm
Ø 125 mm
45°
> 80
> 20.000 ore / hours
PBT + alluminio / PBT + aluminium / PBT + alumínio
250 g

