

MERCURY

Pannello ad incasso quadro led, con finitura bianca

Led recessed panel light - square, white

Painel de embutir quadrado led, com acabamento branco


VRD 34_03 BI 3000K

● 3000 K
186 lumen

VRD 34_03 BI 4000K


● 4000 K
206 lumen

3W IP20

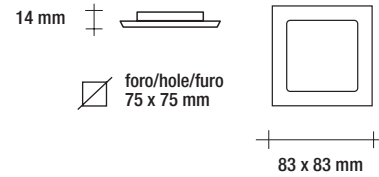

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 220-240V ~ 50/60 Hz
compreso / included / incluído
83x83 mm, H 14 mm
75x75 mm
110°
> 80
> 30.000 ore / hours
alluminio / aluminium / alumínio
111,9 g

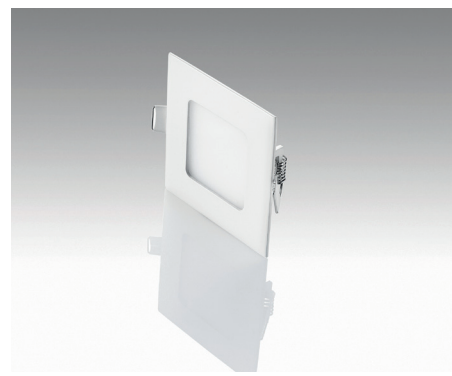


VRD 34_06 BI 3000K

● 3000 K
379 lumen

VRD 34_06 BI 4000K

● 4000 K
399 lumen

6W IP20

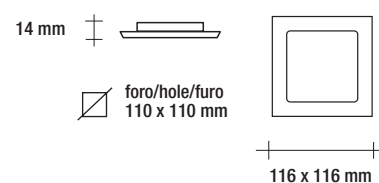

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 220-240V ~ 50/60 Hz
compreso / included / incluído
116x116 mm, H 14 mm
110x110 mm
110°
> 80
> 30.000 ore / hours
alluminio / aluminium / alumínio
180,8 g




VRD 34_09 BI 3000K

● 3000 K
626 lumen

VRD 34_09 BI 4000K


● 4000 K
643 lumen

9W IP20

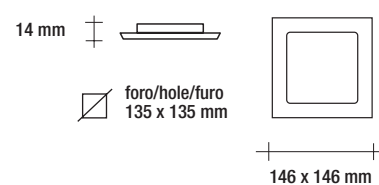

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 220-240V ~ 50/60 Hz
compreso / included / incluído
146x146 mm, H 14 mm
135x135 mm
110°
> 80
> 30.000 ore / hours
alluminio / aluminium / alumínio
257,5 g

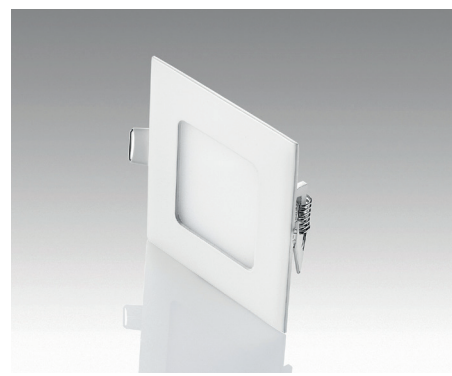

MERCURY

Pannello ad incasso quadro led, con finitura bianca

Led recessed panel light - square, white

Painel de embutir quadrado led, com acabamento branco


VRD 34_12 BI 3000K

● 3000 K
873 lumen

VRD 34_12 BI 4000K

● 4000 K
903 lumen

12W IP20

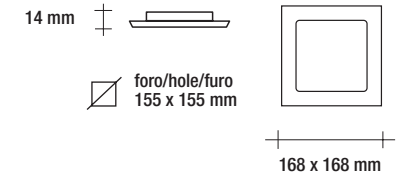

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 220V ~ 50/60 Hz
compreso / included / incluído
168x168 mm, H 14 mm
155x155 mm
110°
> 80
> 30.000 ore / hours
alluminio / aluminium / alumínio
307,4 g




VRD 34_18 BI 3000K

● 3000 K
1443 lumen

VRD 34_18 BI 4000K

● 4000 K
1455 lumen

18W IP20

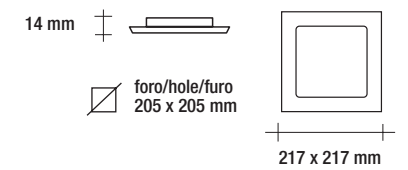

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 220V ~ 50/60 Hz
compreso / included / incluído
217x217 mm, H 14 mm
205x205 mm
110°
> 80
> 30.000 ore / hours
alluminio / aluminium / alumínio
514 g




VRD 34_24 BI 3000K

● 3000 K
1887 lumen

VRD 34_24 BI 4000K

● 4000 K
2105 lumen

24W IP20

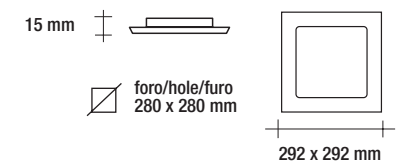

finitura / finished / acabamento
voltaggio / voltage / voltagem
driver
misure / measures / medida
foro / hole / furo
angolo / beam angle / ângulo
cri
durata / life / duração
materiale / material
peso / weight

bianco / white / branco / weiß / blanc / blanco
AC 220V ~ 50/60 Hz
compreso / included / incluído
292x292 mm, H 15 mm
280x280 mm
110°
> 80
> 30.000 ore / hours
alluminio / aluminium / alumínio
921,8 g

